


DCC-WHI-90

CCTV Cable Box 3+1 Cable

D-Link CCTV 3+1 construction cable is of hybrid type with combination of Communication and Electrical conductors. The 3 Electrical conductor wire enables powering of the CCTV camera while the communication cable enable recording of images and communicating with control Room devices based on camera capabilities.

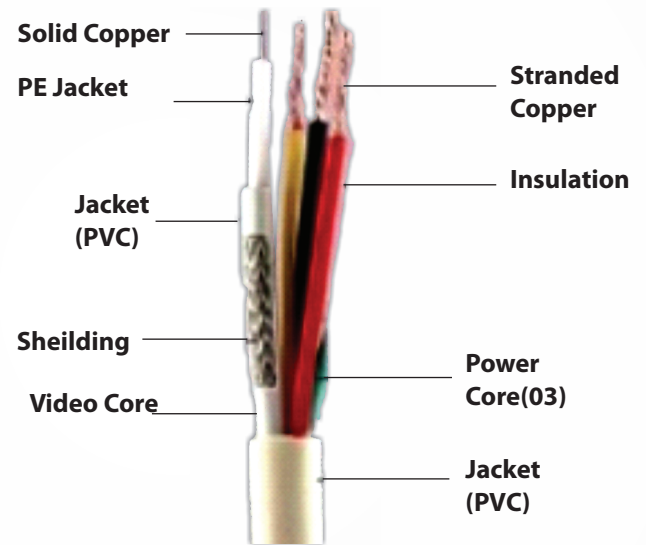

KEY FEATURES

- Support Hybrid cable
- Shielded Communication cable
- Excellent signaling characteristics

SPECIFICATION

POWER CORE CONDUCTOR

Conductor Type	Stranded Annealed Bare Copper Conductor
No. of Wire/Size of Wire (Nos./mm)	16/0.100 ± 0.010 mm
Insulation	PVC
No of Core	3
Colour Code	Red, Black & Yellow
Core O.D.	1.35 ± 0.10mm

VIDEO CORE

Conductor Type	Solid Annealed Bare Copper Conductor
No of Wire/Size of Wire (Nos./mm)	01/0.60 ± 0.015mm
Insulation	Solid PE
No of Core	1
Colour Code	Natural

SHIELD

Shielded with	Al-Foil
Braiding	CCA wire
Video Core Jacketing	PVC
Colour of Jacket	Black
Video Core O.D.	5.5 ± 0.20mm

OUTER SHEATH

Material PVC	PVC
Colour of Jacketing	WHITE (As per Customer Required)
Outer Dia.	8.20 ± 0.20mm
Sequential Marking	Every Meter

PACKING

Standard Length	90Mtrs.in Box
-----------------	---------------

LOW FREQUENCY PARAMETERS

Conductor Resistance (DC) of Solid Core	65 Ω/1KM @20°C Max
Conductor resistance (DC) Of Stranded Core	146Ω/1000m @20°C Max
T.S in PVC Jacket	200Psi(13.8Mpa)
Elongation in PVC Jacket	100%